







Quartz Crystal


SMD-version

part no.	12.85530
model	KX – 5T
frequency	38.40 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±10 ppm
temperature tolerance (incl. aging) -40° ~ +85°C	±20 ppm
load capacitance C_L	9 pF
series resistance R_1 max.	80 Ohm
shunt capacitance C_0 max.	2.0 pF
drive level	50 μ W typ., 100 μ W max.
pulling	±10 ppm/pF (typ.)
contents of reel	1000 pcs.


Dimensions (mm):



Suggested soldering pad:



Reflow soldering condition:

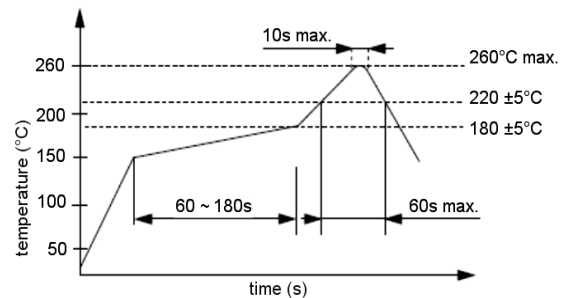

Tape specification:

