


Quartz Crystal


SMD-version

part no.	12.86507
model	KX – 6
frequency	26.0 MHz
mode	fundamental
operating temperature	-0° ~ +55°C
frequency tolerance at +25°C	±10 ppm
temperature tolerance -0° ~ +55°C	±10 ppm
load capacitance C_L	10 pF
series resistance R1 max.	60 Ohm
aging at 25°C (first year) max.	±2 ppm
shunt capacitance C_O max.	3.5 pF
drive level max.	100 µW
contents of reel	1000 pcs.


Dimensions (mm):

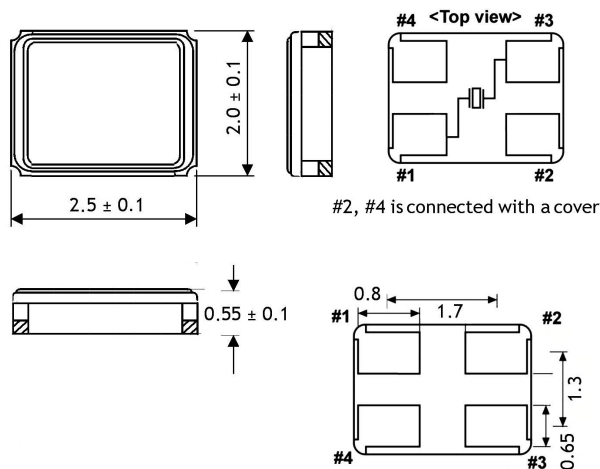

Reflow soldering condition:

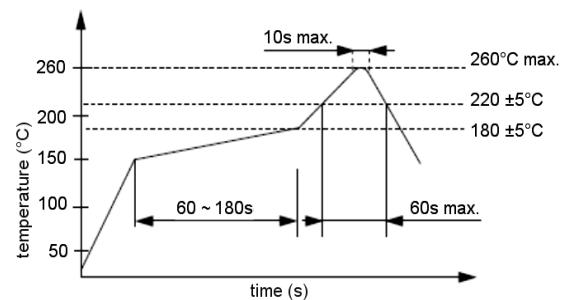

Suggested soldering pad:



Tape specification:

