


Quartz Crystal


SMD-version

part no.	12.88788
model	KX - 7
frequency	54.0 MHz
mode	fundamental
operating temperature	-20° ~ +70°C
frequency tolerance at +25°C	±15 ppm
temperature tolerance -20° ~ +70°C	±15 ppm
load capacitance C_L	19 pF
series resonance R1 max.	15 Ohm
aging at 25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.0 pF
pulling sensitivity	7ppm / pF typ.
drive level max.	350 µW
contents of reel	1000 pcs.


Dimensions (mm):

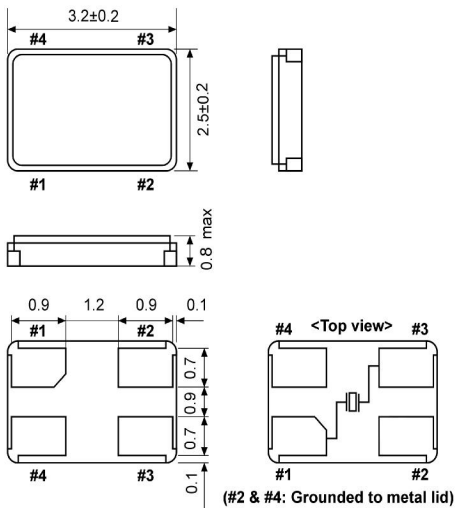

Suggested soldering pad:



Reflow soldering condition:

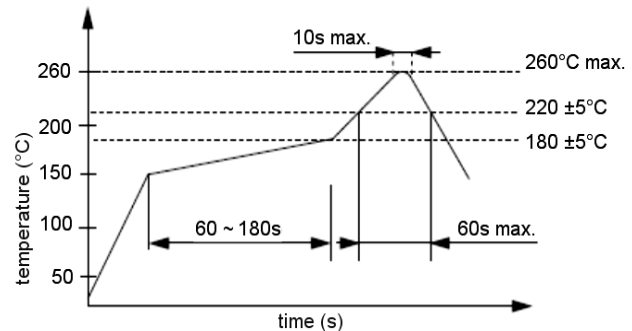

Tape specification:

